



CAN Controller

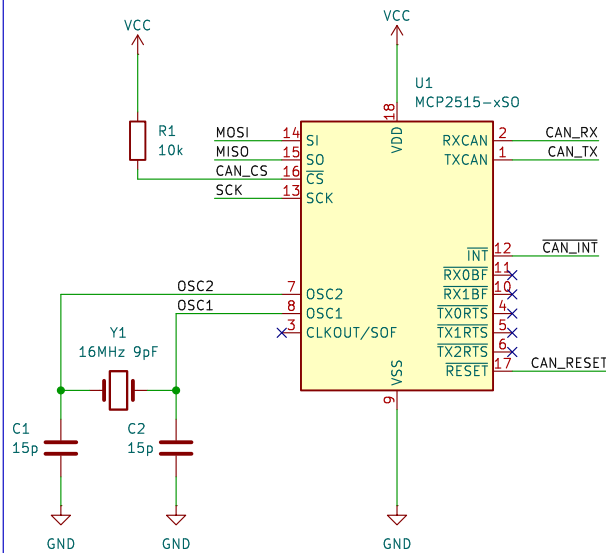


CAN Transceiver




Bus Conditioning

Common-Mode Choke




Jumpers can be soldered to connect lines if CMC is not populated


Split Termination




EMC Bus Caps.




ESD Diodes



RJ45 Connector

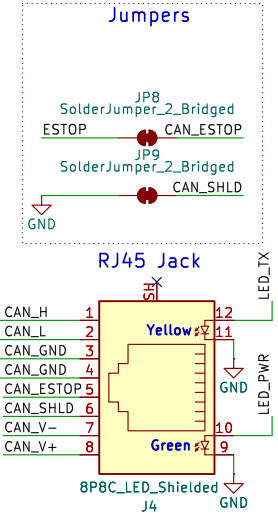


Nano Shield

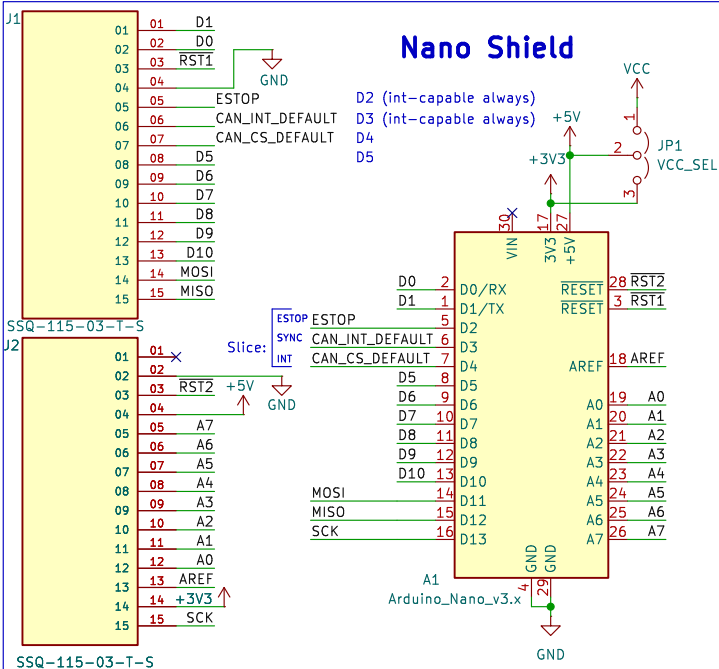


Breakout Header

Header Pins




For debugging; use as external module.

Jumpers




For to break default connections to provide them in use as external module (not shield).

DC-DC PoL Converter

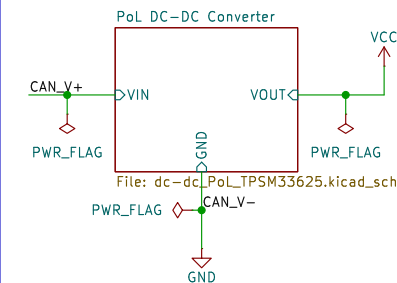

LED Indicators



Sheet: /
File: can-nano-shield-fieldbus.kicad_sch

Title:

Size: A4

KiCad E.D.A. 9.0.1

Date:

Rev:

Id: 1/2

